



HyCover Standard

SHEETING SYSTEM

transcover
we've got it covered!




SAFE

Fast and efficient covering of open top containers from ground level. Automatic tower lowering failsafe included.



SIMPLE

Installation takes just 6 man hours. Once installed a tower raises nearly 5m so you can pull the tarp out against a spring.



FAST

Covers in just 40 seconds!



Low Weight
Just 205kg



Rip resistant mesh options



Low profile & within width





Warranty
See reverse for details



MANUFACTURED BY TRANSCOVER



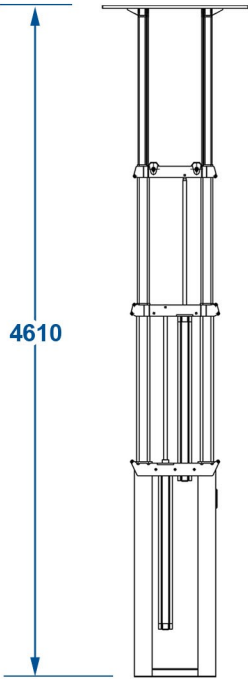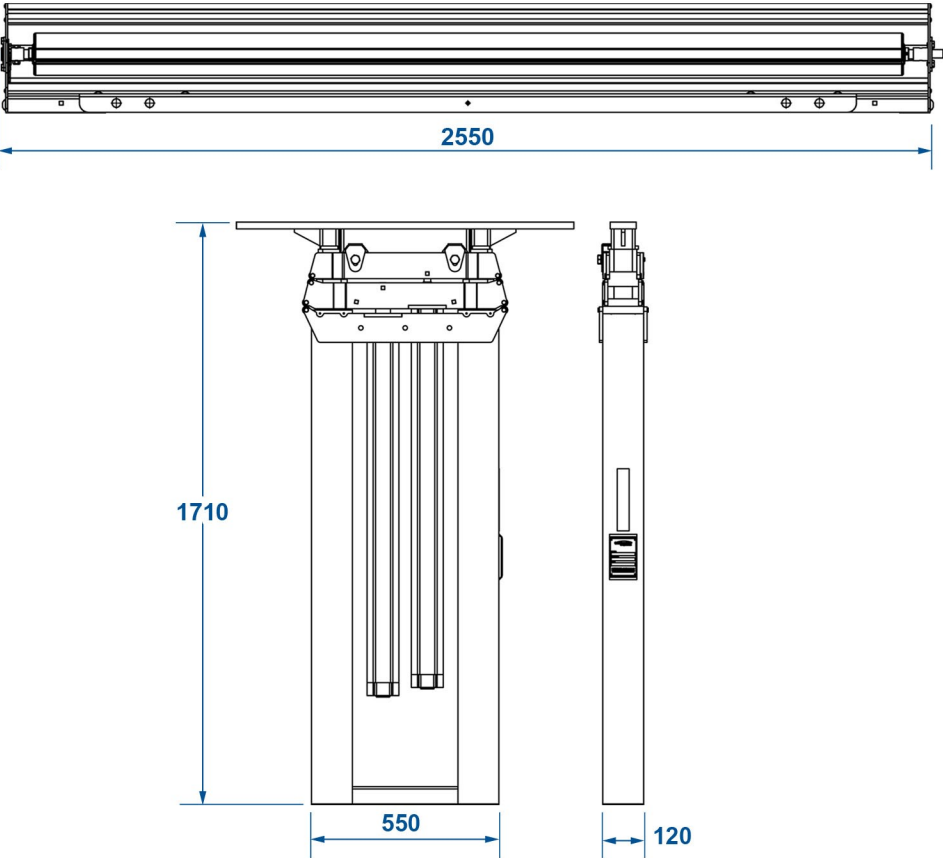

(standard system dimensions)

SYSTEM SPECIFICATIONS

Standard

Manual – Spring retraction

Options

Stop and lock – Spring roller with pull and lock/ release

Doublehead – Dual tarp housing option

Offset tower option for challenging installations

Tower – 3 variations in height

Tower – Wide version to allow hook to sit further forward

Tarp track and guide option

Containers / Body Data

Suitable for containers up to 7m

Weight (approx)

205kg

Tarps

Duramesh

Supermesh

Warranty

1 year

