



### SAFE

Fast and efficient covering of even the most difficult loads safely from ground level.  
Tower lowers automatically as fail safe.



### SIMPLE

Installation takes just 4 man hours. Once installed the tarp housing can be pneumatically raised above the load allowing the tarp to be released by spring (or remote control) and guided/ secured by rope at the rear.



### FAST

Covers in just 30 seconds!



**Strong**  
Steel / aluminium construction.  
No catch points or cables.



**Rip resistant**  
mesh or net options



**Low profile**  
& within width





**Warranty**  
See reverse for details



**MANUFACTURED BY TRANSCOVER**



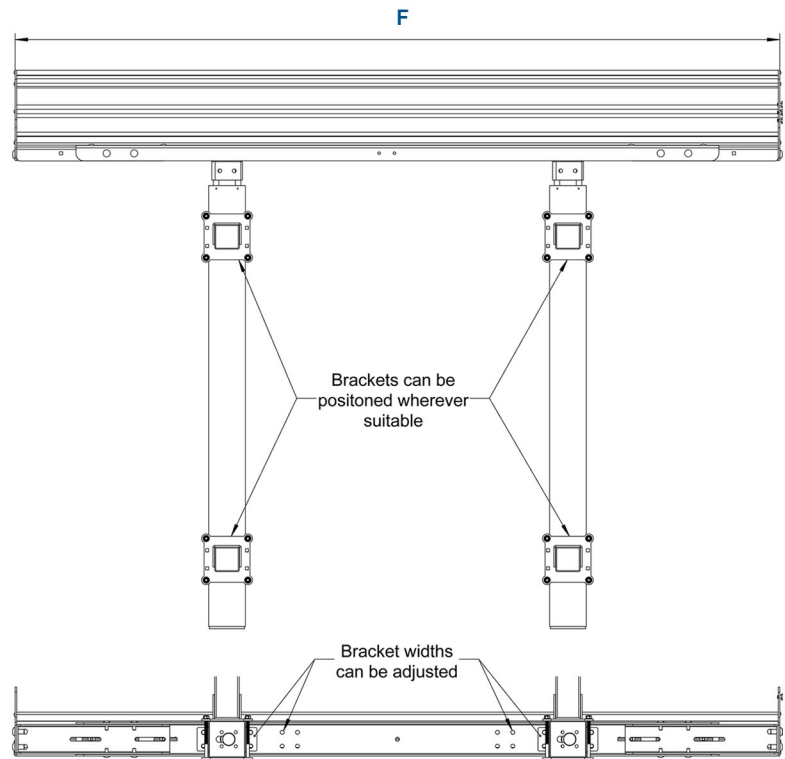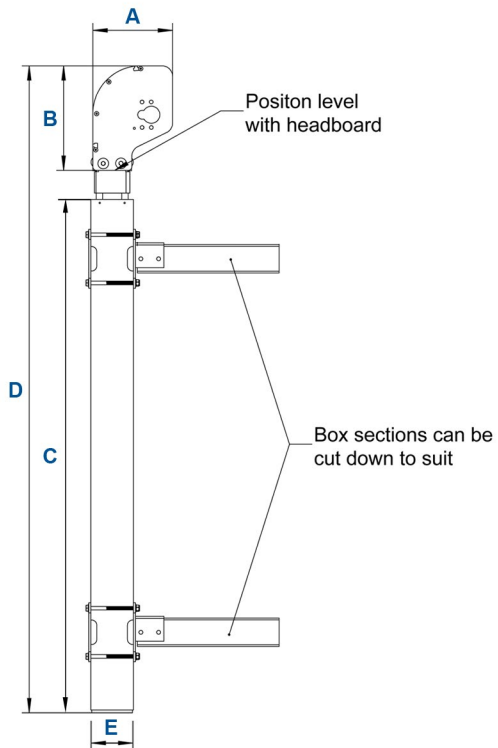

## SYSTEM SPECIFICATIONS

	1m version	750mm version
<b>A</b>	225	225
<b>B</b>	295	295
<b>C</b>	1440	1190
<b>D</b>	1825	1575
<b>E</b>	120	120
<b>F</b>	Required width	Required width

### Versions

Pneumatic tower with 12v wireless remote
Pneumatic tower with 24v wireless remote
Pneumatic tower with spring return

### Containers/ Body

Width – Adjustable 200-255cm
Length – Upto 10m

### Weight

180kg
-------

### Tarps

Duramesh
Supermesh
PVC (Waterproof)

### Warranty

1 year warranty
-----------------