DoubleCover HYDRAULIC SHEETING SYSTEM











SAFE

Fast and efficient covering of even the most difficult loads safely from ground level.



SIMPLE

Installation takes just 10 man hours. Once installed the framework is operated using winding handles from either side of the body to cover the load.



FAST

Covers in just 30 seconds!



Strong Steel construction with cable driven rear frames



Rip resistant mesh or net options



Low profile & within width



Warranty See reverse for details








DOUBLECOVER HYDRAULIC



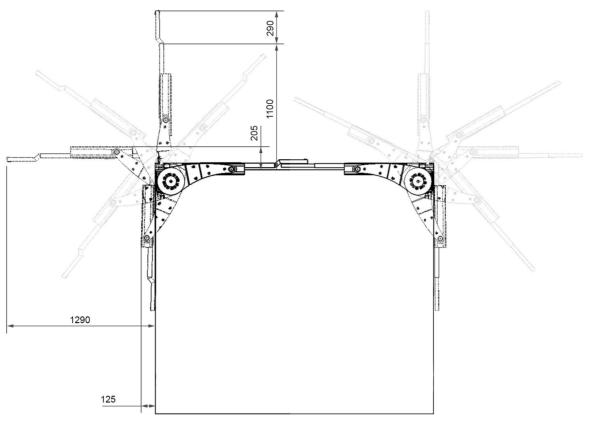

SYSTEM SPECIFICATIONS

Versions Available

Hydraulic Containers / Body Data Suitable for bodies and trailers up to 14m length Weight (approx) 200kg Tarps Duramesh Supermesh Knotted Netting Warranty 1 year

